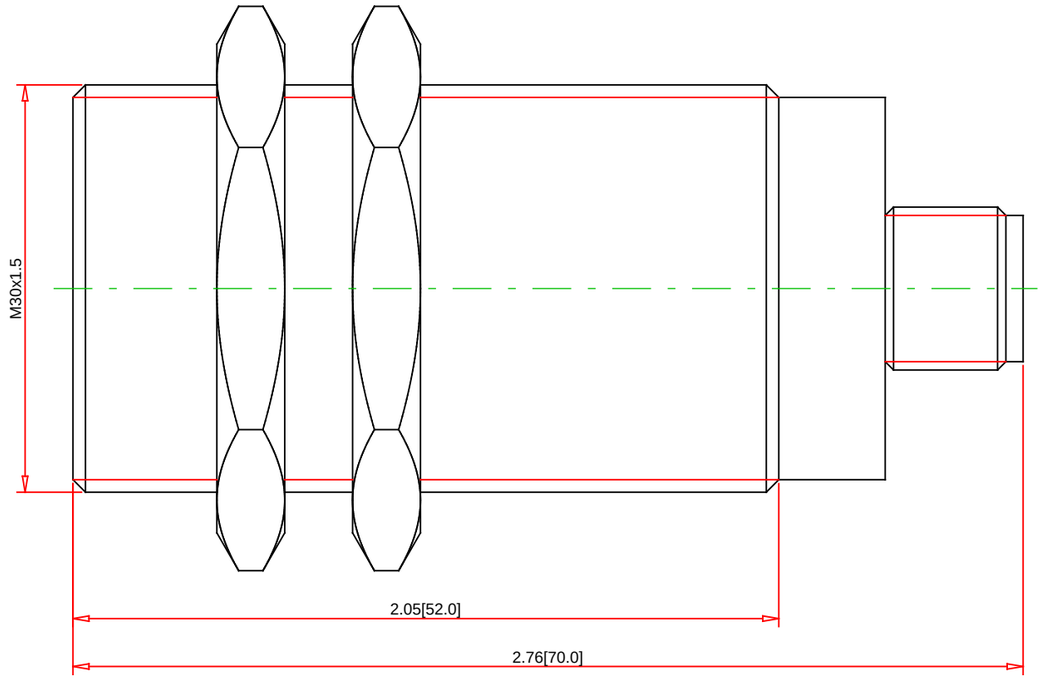


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XS230AAPAM12

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Detecting Distance:	22.0 mm (0.85 in)
Circuit Type:	PNP
Output Mode:	NO
Volts Type:	DC
Voltage Range:	12-24 VDC
Max Load:	200 mA
Shielding:	Non shielded
Max Switching Frequency:	500 Hz
Temp Range:	-25° to 85° C (-13° to 185° F)
NEMA Type:	4X (indoor use only)
IP Rating:	IP67, IP69K
Standards:	UL, CE Rohs

Specification:

Sensor Type:	Inductive
Description:	Proximity Sensor, Inductive, 30 mm Barrel, 12-24 VDC, Non Shielded
Body Style:	Barrel
Diameter:	mm
Housing Material:	Plastic
Cable Size:	
Connector Type:	M12
Special Features:	