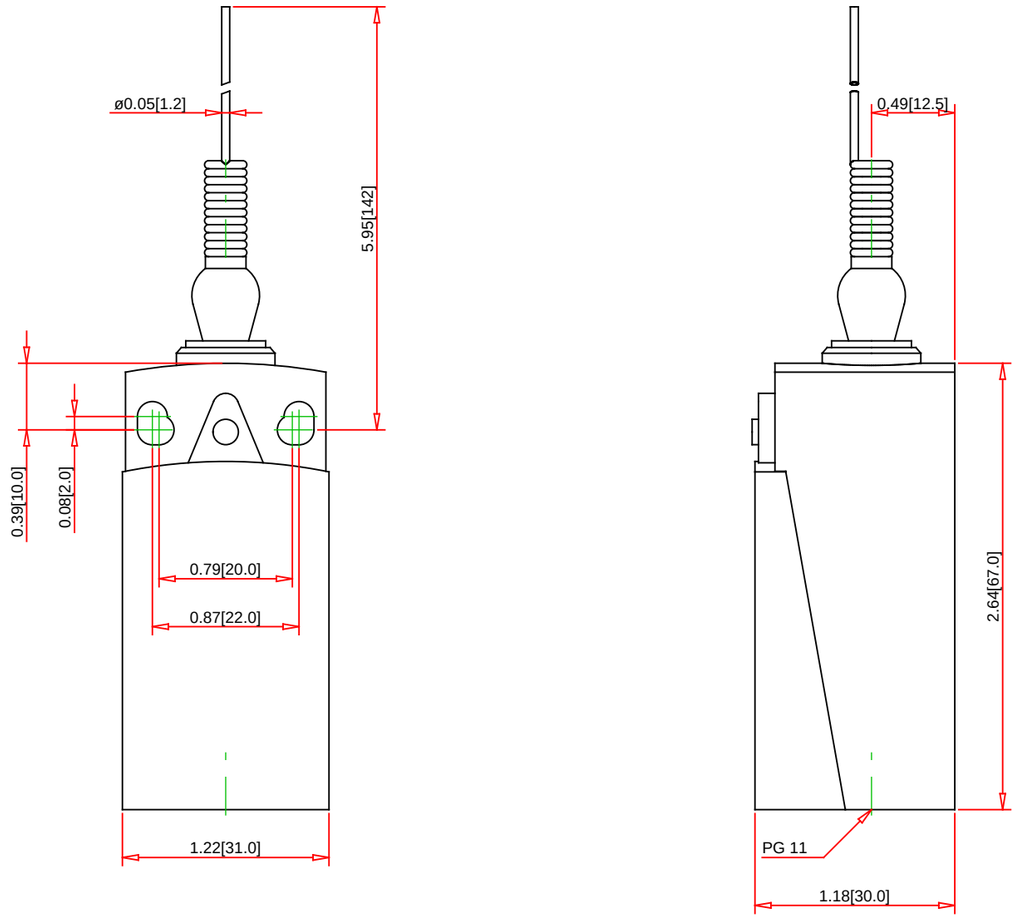


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCKD2106G11

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type:	Screw Clamp
Enclosure Rating:	NEMA 1/2/4/6/12/13; IP66/67
Approvals:	UL # E164353 - CSA # 164581 - CE Marked
Weight:	0.175 kg (0.386 lb)
Conforming to Standards:	CENELEC EN 50047
RoHS:	Yes
Operating Temperature Range:	-13 to 158 ° F
Shock Resistance:	50G
Vibration Resistance:	25G
Max. Actuation Speed :	1 m/s
Repeat Accuracy:	
Operating Torque/Force:	18.40 Inch-Ounces (0.13Nm)

Specification:

Description:	XCKD Limit Switch Omnidirectional cat whisker
Body Style/Type Description:	IEC OsiSense Limit Switches XCKD Compact Modular 31mm Metal Body
Head Type:	ZCE02 Steel top roller plunger
Lever Arms:	
Body with Contact Type:	ZCD21 2-pole N.O./N.C. snap action
Conduit Thread:	ZCDEG11 PG 11
Ampere Rating Continuous:	10A
Maximum Voltage Rating:	240VAC/250VDC
Actuation:	Any Direction
Actuator Action:	Momentary
Lever Arm Length:	
Roller Dimension:	
Roller Material:	
Contact Configuration:	1 N.O./1 N.C.
Contact Operation:	Snap Action
Connection Type:	Conduit Entrance (Pg 11)
Head Material:	Zamak
Positive Opening:	No
Cable Length:	