

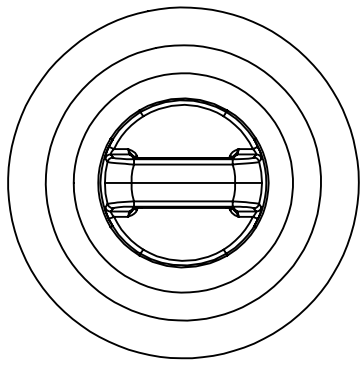
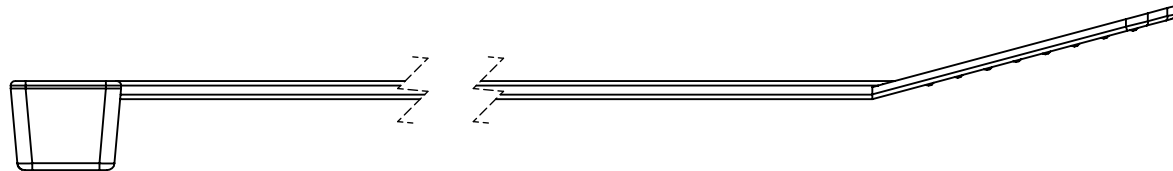


MAGCTM15L
Delivery Condition - un-assembled

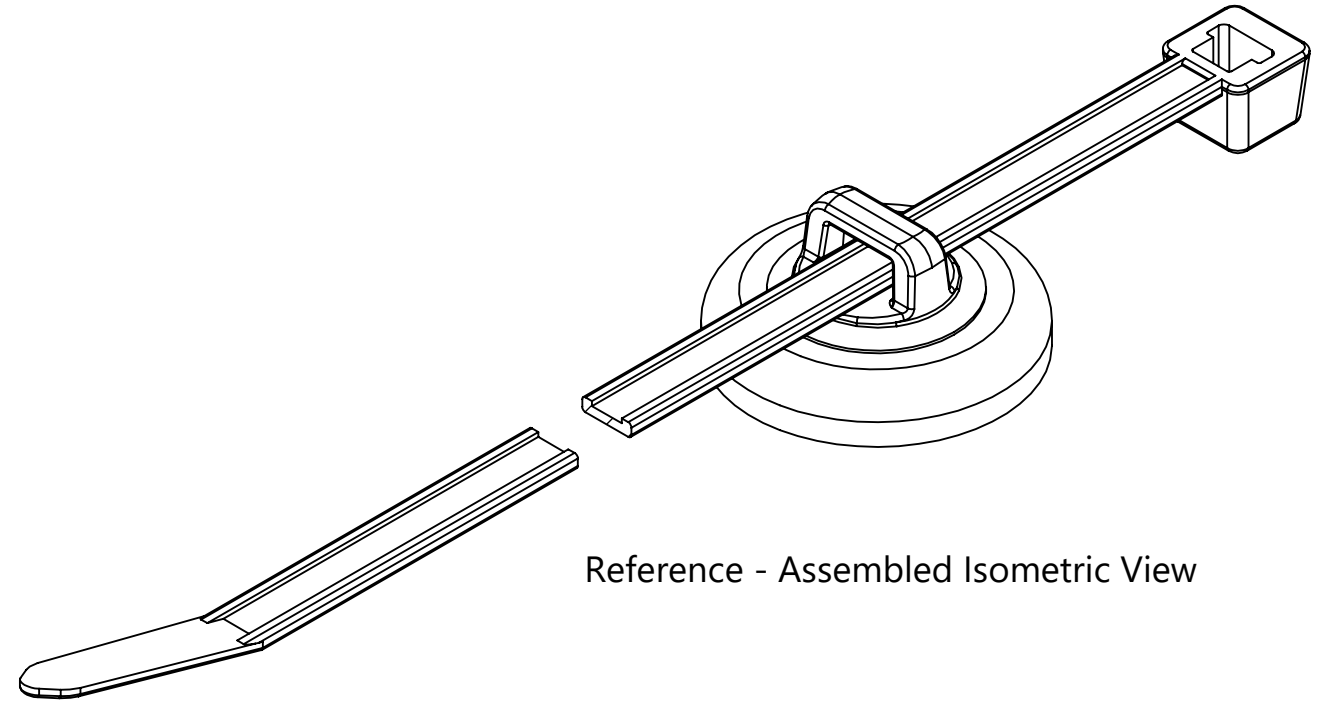

T50R
Delivery Condition - un-assembled




Reference - Assembled Isometric View

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible:
 1. Magnet Mount: 10%
 2. Cable Tie: 25%
4. Maximum allowable flash to be (cable tie only): 0.25mm
5. Maximum allowable mismatch to be:
 1. Cable Tie: 0.10mm
6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages

Reference:

1. Cable Tie Min Loop Tensile Strength: 222N (50 lbf)
2. Magnetic Mount Min Vertical Pull Strength: 66.7N (15 lbf)
 1. UL Listing # E64139

Global Part Description				Magnet Mount			Cable Tie								
T50RMAGCTM15LSET-NDFEB35/POM/ST/PA66HS-BK				Drawing	Material	Color	Drawing	Material	Color						
				23-0065-002-CSU	POM	Black	CT2050007CST	PA66HS	Black						
					NdFeB N35M	Silver									
					Steel	Black									
Revision level		Revision Record				The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title Magnetic Cable Tie Mount, Large, 15 lbf pull rate, Black with T50R cable tie, Unassembled Set		Scale 2:1	
Drawing	State	Part	ECN 017476 - Initial Release					Johnson		2023/04/03				Global Project Number 23-0079	
00.4	Design Release	-	All drawing revision are stored in CAD PDM database		Approved		Date (YYYY/MM/DD)		Format A3						
Changed		Date (YYYY/MM/DD)			Toll		2023/04/14		Drawing-No 23-0079-001-CSU						
Johnson		2023/04/03			Units mm		HellermannTyton www.HellermannTyton.com		Sheet 1/1						
Approved		Date (YYYY/MM/DD)													
Toll		2023/04/14													