



UPC: 192552006071

Color: White

Weight: 0.0 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

A-line, 80CRI Dimmable

Description:

Economical contractor grade A-lamps in convenient pack sizes that eliminate excess waste at the right price.

Wattage Equivalency:

60W Incandescent

Input Wattage:

9W

Lumens (Nominal):

800lm

Efficacy:

89lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:

Constant Current 120V 50/60 Hz; 120V: 80mA

THD:

<80%

Power Factor:

0.7

Dimmable:

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

Input Voltage:

120V

Flicker:

_85%

Construction

Operating Temperature Range:

-4°F - 104°F (-20°C - 40°C)

Shape:

A19

Finish:

White

Endcap Material:

Nickel-plated aluminum

Enclosure Material:

Constructed from frosted, shatter-resistant polycarbonate

Lens Finish:

Frosted

LED Characteristics

Beam Angle:

160°

Color Temperature:

3000K

Color Accuracy (CRI):

≥80 CRI

R9 Value:

High color performance with R9 greater than 0

Color Consistency:

<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Base Type:

E26 Edison

Compliance

ETL Listed:

This product has been tested by Intertek and found in compliance with accepted national standards.

Technical Specifications (continued)

Environment:

Suitable for use indoors in dry and damp environments.

Fixture Rating:

Suitable for use in enclosed fixtures

Energy Star Approved:

No

DLC Listed:

No

Certification Model Number:

A30028(A19-10-E26-830-DIM)

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Not Lawful for Sales in California

NEC Compliant:

No

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules


Other**3-Year, No-Compromise Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	24	13.58	9.45	5
PALLET	2	42.13	39.37	42.52

Dimension

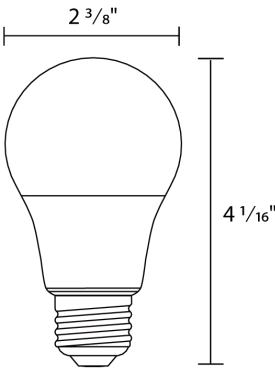

Features

- Energy-efficient replacement for incandescent and halogen lamps
- Durable plastic construction reduces risk of breakage
- Rated for use in enclosed and open fixtures in dry or damp locations
- Frosted lens produces smooth diffuse light
- 6-pack makes it convenient for contractors

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp	Dimmable	Pack
A19	-	10	-	E26	-	830	DIM	6PK
		8.5W = 8.5			E26 Base = E26	80 CRI, 5000K = 850	Non-Dimmable = ND	6 Pack = 6PK
		10W = 10				80 CRI, 4000K = 840	Dimmable = DIM	
		13.5W = 13.5				80 CRI, 3000K = 830		