LCGATEWAY/4G/VZ



Project:	Type:
Prepared By:	Date:

The Gateway stores all local site information (energy monitoring, schedules, scenes, and more) and communicates with RAB's servers via private 4G cellular connection, so no internet access is required. This Gateway operates on the Verizon cellular network.

Color: Black

Weight: 1.3 lbs

Technical Specifications

Compliance

UL Listed:
Indoor use only

Electrical

Installation:
All Lightcloud components should be installed by a licensed electrician in accordance with local codes.

Input Voltage:
Only use with provided power supply.
5VDC +/- 5%
100-240VAC

Frequencies:
50/60 Hz

Electrical Ratings:
0.5A

Operating Temperature Range:
-30°C to 70°C


Storage Temperature Range:
-40°F to 185°F (-40°C to 85°C)

Other

Warranty:
10-year full hardware warranty with 100% repair/replacement coverage for all properly installed devices. See Lightcloud Warranty Terms.

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Dimensions

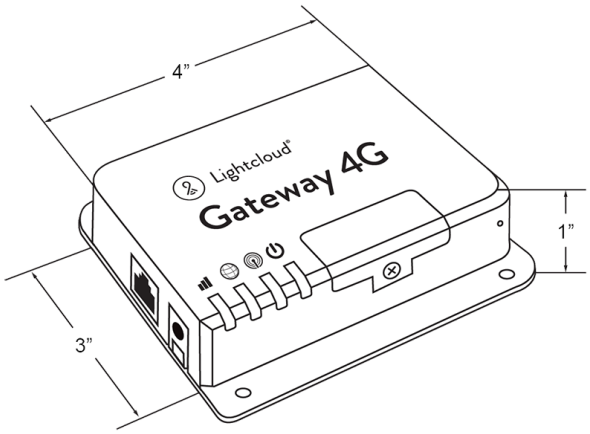

Features

- Connects with up to 200 Lightcloud devices
- Communicates with Lightcloud devices via 2.4 GHz wireless mesh network
- Cloud-based management - no software to install or maintain
- Connects to Lightcloud service using secure cellular 4G connection and no internet access is required
- Easy setup - simply power on, confirm a cellular signal and call 844-LIGHTCLOUD

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice