DSK34-6R16.5930120WS

RAB | Residential

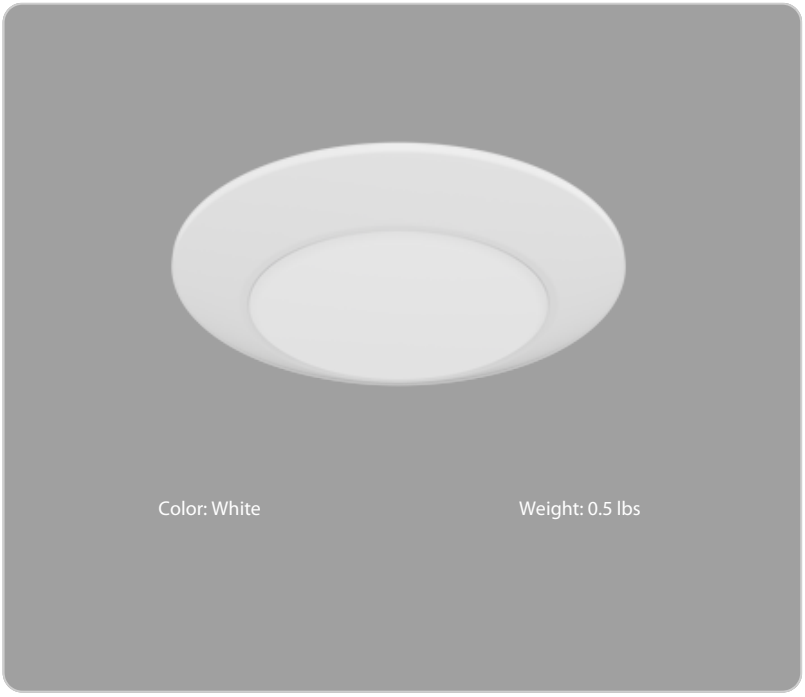

Color: White

Weight: 0.5 lbs

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	Constant Current
120V	0.18A
208V	N/A
240V	N/A
277V	N/A
Input Watts	16.5W

LED Info

Watts	16W
Color Temp	3000K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	1,221 lm
Efficacy	0

Technical Specifications

Performance

Description:
The DISK34 is an ultra low profile surface-mount, ideal solution for new construction and retrofit applications. IC rated for direct contact with insulation, air tight, suitable for indoor applications in dry and damp environments. Mounting kit for recessed housing sold separately.

Product Type:
Surface & Flush Mounts

Input Wattage:
16.5W

Lumens:
1,200lm

Efficacy:
72.7lm/W

L70 Lifespan:
50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:
Suitable for damp locations

UL Classified:
Yes

Fixture Rating:
Open

IC Rated:
Suitable for direct contact with insulation

Electrical

Dimming Driver:
TRIAC compatible dimmer with dimming as low as 5%

Power Factor:
0.9

Flicker:
<30%

Input Voltage:
120V

Operating Frequency:
60Hz

Construction

Material:
Aluminum

Trim Style:
Smooth Trim

Shape:
Round

Operating Temperature:
-22°F (-30°C) to 104°F (40°C)

LED Characteristics

Beam Angle:
110°

R9 Value:
High color performance with R9 greater than 50

Installation

Mounting:
Surface mount

Other

5-Year, No-Compromise Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

DSK34-6R16.5930120WS

RAB | Residential

Dimensions

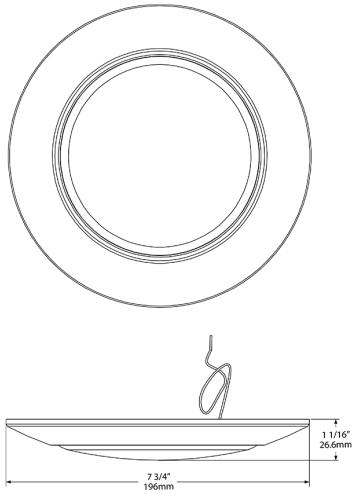

Features

- Super low profile backlit LED with driverless design
- Stamped aluminum housing
- New construction or retrofit applications
- Simple and quick installation from below the ceiling
- Installs on standard 4" and 6" junction boxes
- Can be retrofitted to existing downlight housings with option accessory
- Suitable for Damp locations
- Dimmable down to 5% on compatible dimmers
- 5-Year, limited warranty

Ordering Matrix

Family		Size	Shape	Wattage	CRI/Color Temp	Driver	Finish	Trim
DSK34	–	6	R	16.5	930	120	W	S
		6 = 6" **4 =** 4"	**R =** Round	**12 =** 12W **14 =** 14W **16 =** 16W **16.5 =** 16.5W	**935 =** 90 CRI, 3500K **927 =** 90 CRI, 2700K **930 =** 90 CRI, 3000K **940 =** 90 CRI, 4000K **950 =** 90 CRI, 5000K	**120 =** 120V	**W =** White **B =** Black **BR =** Bronze **BN =** Brushed Nickel	**S =** Smooth

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice