

Contractor-grade Plastic (Dimmable) A-Shape Lamps

14A19/CNG/850/FR/P/E26/D 4/4CT

Plastic A19 offering dimmability and a lifetime over 15,000 hours. Ideal for contractor-grade residential and multi-family spaces.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED

Light Technical	
Color Code	850 [CCT of 5000K]
Luminous Flux	1,600 lm
Luminous Efficacy (rated) (Nom)	114 lm/W
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	14 W
Lamp Current (Nom)	120 mA
Wattage Equivalent	100 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	120 V

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	90 °C

Controls and Dimming	
Dimmable	Only with specific dimmers

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Bulb Shape	A19
UL Wet/ damp/ dry location	Damp location

Contractor-grade Plastic (Dimmable) A-Shape Lamps

Approval and Application	
EU RoHS compliant	Yes
T20 compliant	No

Application Conditions	
can it be used in closed luminaires	Yes

Product Data	
Order product name	14A19/CNG/850/FR/P/E26/D 4/4CT
Full product name	14A19/CNG/850/FR/P/E26/D 4/4CT

Order code	929003585304
Material Nr. (12NC)	929003585304
Numerator - Quantity Per Pack	4
Net Weight (Piece)	0.056 kg
EAN/UPC - Product/Case	046677581862
Numerator - Packs per outer box	4
EAN/UPC - Case	50046677581867

Dimensional drawing



Product	D	C
14A19/CNG/850/FR/P/E26/D 4/4CT	60 mm	117 mm

Photometric data



General uniform lighting - 14A19/CNG/850/FR/P/E26/D 4/4CT

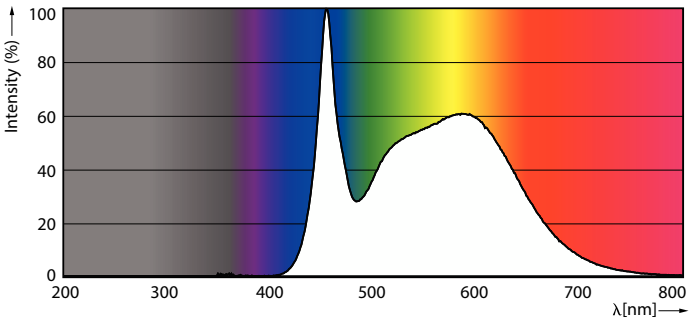

Spectral Power Distribution Colour - 14A19/CNG/850/FR/P/E26/D 4/4CT

Contractor-grade Plastic (Dimmable) A-Shape Lamps

Photometric data



Light Distribution Diagram - 14A19/CNG/850/FR/P/E26/D 4/4CT

Lifetime

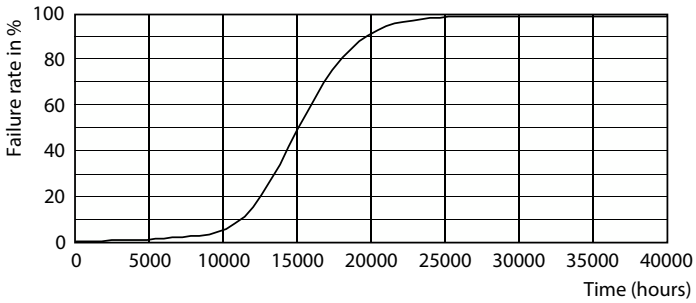

Life Expectancy Diagram

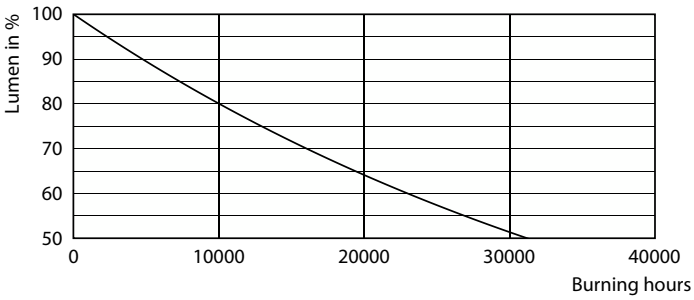

Lumen Maintenance Diagram - 14A19/CNG/850/FR/P/E26/D 4/4CT

© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.