PHILIPS

Day-Brite

Stock Product Guide



Easy order.
Budget friendly.
Job ready.

philips.com/luminaires



Things just got easier. Introducing our new line up of lighting essentials – quick to order, easy on your wallet and simple to use.

Make your next lighting choice a brand you can trust. **Make it Philips Day-Brite.**

Industrial

Sealed high bay



Modern design + **energy-savings**

Philips Catalog Code	Lumens	Color Temp	Voltage	Replaces
HCX15L840-UNV-DIM	15,000	4000K	120-277V	**6xF32T8 or 400W HID**
HCX22L840-UNV-DIM	22,000		120-277V	**8xF32T8 or 400W HID**


Functional high bay lighting has a new look with **Philips Day-Brite LED Sealed high bay** luminaires. No more sacrifices, just great looks, dependability and energy savings.


Why choose the Sealed high bay?

- Die cast frame and driver containment housing.
- Heavy duty eyelet provided for connection to customer-supplied suspension.
- Lumen maintenance up to 70% (L70) at 50,000 hours.
- Exposed leads for wiring connection with sleeving for environmental protection.
- cULus listed for use in wet locations up to 40C ambient.
- Components are RoHS compliant.



Dimensions

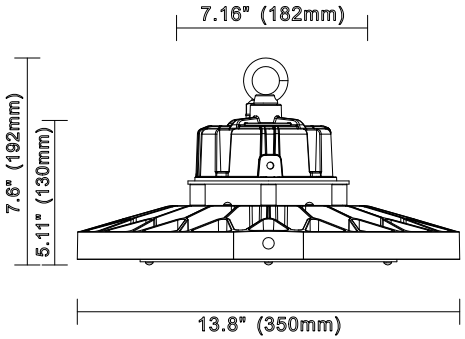

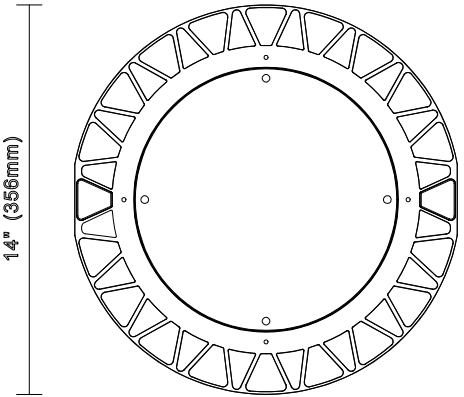

philips.com/luminaires

Industrial

Value high bay



Update & upgrade **for real savings**

Philips Catalog Code	Lumens	Color Temp	Voltage	Replaces
FCX15L840-UNV-DIM	15,000	4000K	120-277V	**6xF32T8 or 400W HID**
FCX22L840-UNV-DIM	22,000		120-277V	**8xF32T8 or 400W HID**


With its low profile and durable design, you might overlook the efficiency and great price, but take a second look. The **Philips Day-Brite LED Value high bay** luminaire has it all.


Why choose the Value high bay?

- Die formed sheet metal housing and end plates.
- Corrosion resistant gloss white paint after fabrication finish.
- V-hooks and 48” chains supplied (set of 2) for installation.
- Lumen maintenance up to 70% (L70) at 50,000 hours.
- Access plate located on top of housing for easy wiring.
- cULus listed for use in damp locations up to 40C ambient.
- Components are RoHS compliant.



Dimensions

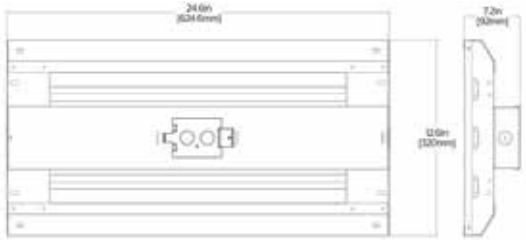

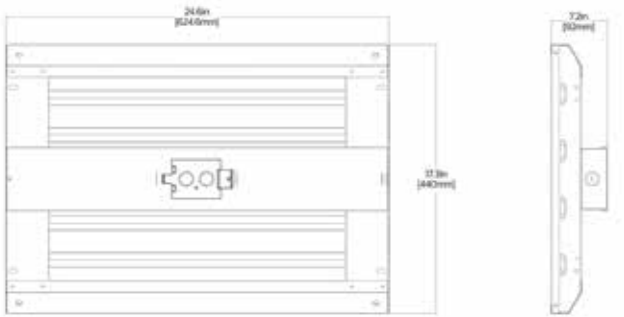

philips.com/luminaires



Compact & **economical** with the latest technology

Philips Catalog Code	Size	Lumens	Color Temp	Dimming	Replaces
FBX16LL40-UNV	2' x 2'	16,000	4000K	0-10V	**6xF32T8 or 400W HID**
FBX16LL50-UNV			5000K		
FBX24LL40-UNV	2' x 2'	24,000	4000K	0-10V	**8xF32T8 or 400W HID**
FBX24LL50-UNV			5000K		
FBX CHAIN KIT, FBX-GRIP10, FBX-GRIP5, FBX-PENHGR	High bay mounting accessories (54" chains, 10' cable, 5' cable, pendant hanger)				

Philips Day-Brite LED High bay industrial luminaires save energy without straining your project budget or sacrificing light output.


Why choose the High bay?

- Versatile fixture ideal for a variety of spaces including warehouses, big box retail and school gymnasiums.
- 16,000 & 24,000 lumen versions available.
- Both versions are serious energy savers with efficacy up to 138 lumens per watt.
- Simple installation.
- Dimming is standard.
- DLC listed.




Mounting options

CABLE MOUNT
& V brackets
(5′ or 10′ cables)



PENDANT hanger
(adds 3" to height)


CHAIN KIT
54" chains
& V brackets





Accessories

WIRE GUARD



philips.com/luminaires

Linear

Strip, wraparound & industrial



Real convenience for your operation's success


Philips Catalog Code	Size	Lumens	Color Temp	Dimming	Replaces
FSSEZ440L830-UNV (Strip)	4'	4000	3000K	N/A	**2xF32T8**
FSSEZ440L840-UNV (Strip)			4000K		**2xF32T8**
FSWEZ440L830-UNV (Wraparound)	4'	4000	3000K	N/A	**2xF32T8**
FSWEZ440L840-UNV (Wraparound)			4000K		**2xF32T8**
FSI455L840-UNV-DIM (Industrial)	4'	5500	4000	0-10V	**3xF32T8**
FSI8110L840-UNV-DIM (Industrial)	8'	11000	4000	0-10V	**6xF32T8**

Tough and dependable, the **Philips Day-Brite LED Linear** family includes strip, industrial and wraparound luminaires for ease of handling and flexibility.

Why choose these Linear luminaires?


- Tough and dependable, the Philips Day-Brite LED Linear family includes strip, industrial and wraparound luminaires.
- Efficacy up to 131 lumens per watt.
- Simple installation.
- Before, during and after installation, you can trust them to help you quickly complete projects without hassles or troubleshooting, while delivering consistent comfort and long-term energy savings.






FSSEZ: Linear strip

- Efficacy: 114 lm/W
- 4ft lengths
- Lumen output: 4000lm*
- Color temperatures: 3000K or 4000K



FSWEZ: Linear wraparound

- Efficacy: 109 lm/W
- 4ft length
- Lumen output: 4000lm*
- Color temperatures: 3000K or 4000K



FSI: Linear industrial

- Efficacy: 131 lm/W
- 4ft & 8ft lengths
- Lumen outputs: 5500 or 11,000lm*
- Color temperature: 4000K
- 0-10V 1% dimming

*Nominal delivered lumen output at 25°C ambient.

philips.com/luminaires



Rugged reliability for efficient environments

Philips Catalog Code	Size	Lumens	Color Temp	Dimming	Replaces
V3WEZ440L840-UNV	4'	4000	4000K	N/A	**2xF32T8**

Philips Day-brite LED Wet linear strip will work hard and long to give you the durability you are looking for in challenging locations.


Why choose the Wet linear strip?

- A superb choice for tough environments both indoor and out.
- The molded fiberglass and reinforced polyester body mean no rusting, oxidation or corrosion.
- LED light engines and drivers are field replaceable.
- cETLus listed to meet UL for -20C to 40C ambient. Suitable for wet locations.
- Components are RoHS compliant.
- 5 Year limited warranty.




Dimensions

Length: 51-9/16" (1310mm)



Mounting Bracket

(Set of two included)





A good deal more than quality & long life

Philips Catalog Code	Size	Lumens	Color Temp	Dimming	Replaces
2FXP38B835-2-DS-UNV-DIM	2x2’	3800	3500K	0-10V	**2xF17T8**
2FXP38B840-2-DS-UNV-DIM			4000K		**2xF17T8**
2FXP42B835-4-DS-UNV-DIM	2x4’	4200	3500K	0-10V	**2xF32T8**
2FXP42B840-4-DS-UNV-DIM			4000K		**2xF32T8**


Philips Day-Brite Flat panel LED sets the stage for quality, affordability and longevity. Each low profile, dimmable luminaire will give you the peace of mind and reliablity of lasting performance.

Why choose the Flat panel LED?

- Help bolster wellbeing and productivity without worrying about flicker and other undesired effects.
- Immerse users in comfortable, welcoming spaces that are free of glare with color that remains consistent throughout the space and over time.
- Protect both the integrity of electrical equipment and overall building efficiency from the effects of total harmonic distortion.
- Well-suited for office, healthcare and educational facilities.



Dimensions

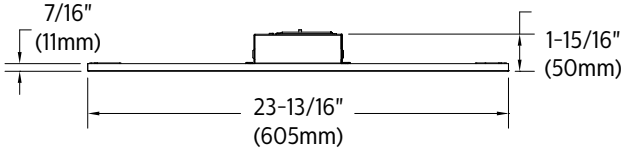

Philips drivers provide reliable performance for peace of mind.



philips.com/luminaires



Clear cut progress, **lasting & consistent**


Philips Catalog Code	Size	Lumens	Color Temp	Dimming	Replaces
2FGG38B835-2-D-UNV-DIM	2' x 2'	3800	3500K	0-10V	**2xF17T8**
2FGG38B840-2-D-UNV-DIM			4000K		**2xF17T8**
2FGG42B835-4-D-UNV-DIM	2' x 4'	4200	3500K	0-10V	**2xF32T8**
2FGG42B840-4-D-UNV-DIM			4000K		**2xF32T8**

The **Philips Day-Brite LED Recessed troffer** is the ideal solution for functional, efficient, and environmentally friendly illumination throughout the space.


Why choose the Recessed troffer?

- Discretely designed to blend seamlessly into your space.
- Access to LED boards and drivers from below the ceiling increases maintenance convenience.
- Diffused ribbed lens creates soft, even illumination.
- Choose from 3500 or 4000K color temperatures.



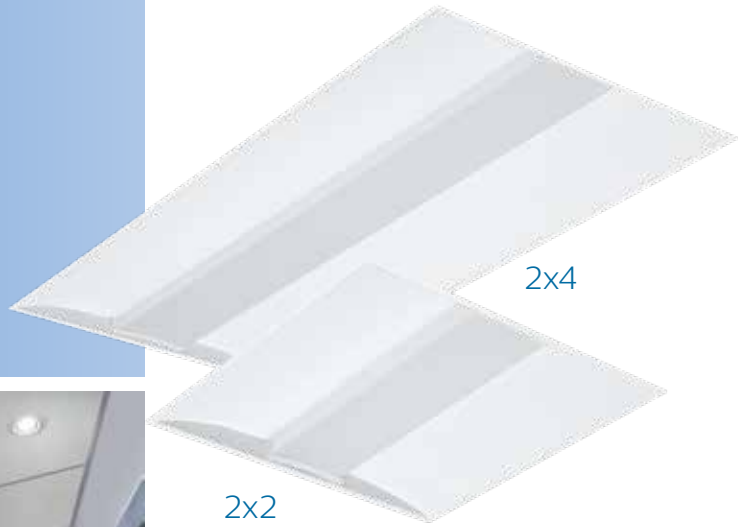

Dimensions

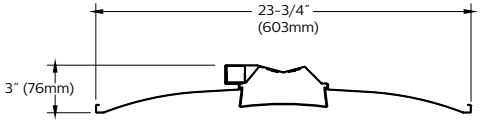

Exit & Emergency

Emergency unit
Exit combo
Exit sign



Flexibility, value & **peace of mind**

Philips Catalog Code	Letter Color	Finish	Operation	
VERWEM (Exit Sign)	Red	White	Emergency (Nicad Battery)	
VEGWEM (Exit Sign)	Green	White	Emergency (Nicad Battery)	
Philips Catalog Code	**Voltage**	**Finish**	**# LED Lamps**	**Remote**
VLLCR2R (Red Letter Exit Combo)	3.6V	White	2 - 1W	2-1W or 1-2W Head
VLLCG2R (Green Letter Exit Combo)	3.6V	White	2 - 1W	2-1W or 1-2W Head
VLLU (Emergency Unit)	3.6V	White	2 - 1W	None
VLL1R (Remote Lamp Head)	3.6V	White	1 - 1W	Indoor
VLL2R (Remote Lamp Head)	3.6V	White	2 - 1W	Indoor
VLL1RGO (Remote Lamp Head)	3.6, 6, 9.6 or 12V	Gray	1 - 1W	Outdoor
VLL2RGO (Remote Lamp Head)	3.6, 6, 9.6 or 12V	Gray	2 - 1W	Outdoor


The **Philips Day-Brite LED Exit and Emergency** stock products feature low profile designs and great value.

Why choose Day-Brite Exit & Emergency products?

- A complete family of dependable products to make buying, ordering & installation for large projects easier.
- Exit signs run off a long-life, 6 volt maintenance-free battery.
- All 3 versions can mount on wall or ceiling.
- Emergency unit and Exit combo can be used for indoor or covered outdoor spaces.
- Units and combos also contain a manual test switch with LED light indicator and supply emergency illumination for at least 90 minutes.




Dimensions

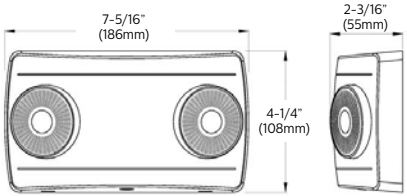


VLLU






VE



Canopy



VLLC

philips.com/luminaires



© 2018 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

PDb-1808PG 08/18 philips.com/luminaires

Philips Lighting
North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873
Tel. 855-486-2216

Philips Lighting Canada Ltd.
281 Hillmount Rd,
Markham, ON,
Canada L6C 2S3
Tel. 800-668-9008