Rittal – The System.

Faster – better – everywhere.

Ground rail, vertical for TS – DK 7544.000

Date : May 24, 2018

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Ground rail, vertical for TS – DK 7544.000

created: 24.05.2018 build on www.rittal.com/us-en

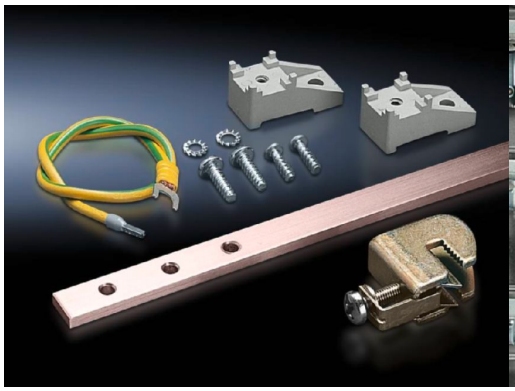
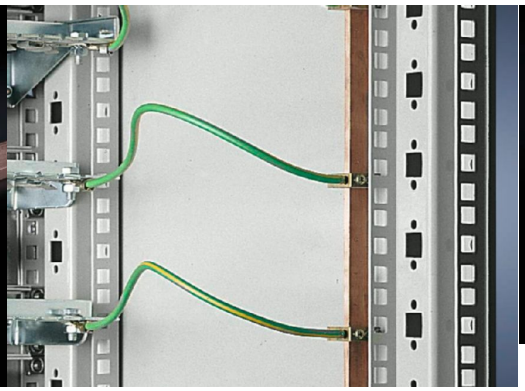


Product description

Description:	Easy to mount on 25 mm DIN hole pattern on distributor or on 482.6 mm (19") punched rails. The supplied ground conductors facilitate star grounding of cable clamp straps on patch panels. The ground terminals are fully adjustable. Rail current carrying capacity approx. 200 A.
Supply includes:	Ground rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm 16 conductor connection clamps 2.5 – 16 mm² 15 grounding leads 6 mm², L = 500 mm Fasteners

Product features

Suitable for:	Enclosure type: TS Height: 1400 mm (55 ″)
Dimensions:	Length: 1145 mm (45 ″)
Packaging unit:	1 pc(s).
Weight/packaging unit:	2.22 kg (4.9 lb.)
EAN:	4028177131859
Customs tariff number:	74199990
ETIM 6.0:	EC000329
ETIM 5.0:	EC000329

© Rittal 2018

eCl@ss 8.0/8.1:	27400605
eCl@ss 7.0/7.1:	27149205
eCl@ss 6.0/6.1:	27149205
eCl@ss 5.1/5.1.4:	27189215
Product description (long):	DK Earth rail, vertical, L: 1145 mm, For H: 1400 mm, For TS

Approvals

Certificates:	EAC

© Rittal 2018