Rittal – The System.

Faster – better – everywhere.

Toroidal Transformer Primary connection 115 V/400 V – SK 3201.970

Date : May 24, 2018

ENCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Toroidal Transformer Primary connection 115 V/400 V – SK 3201.970

created: 24.05.2018 build on www.rittal.com/us-en

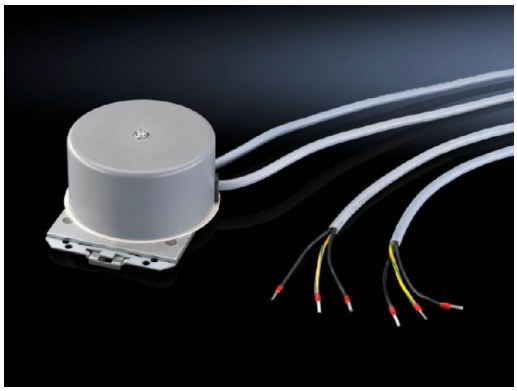

Product description

Description:	For the power supply of wall-mounted 230 V air/water heat exchangers. Available with 115 V or 400 V primary connection.
Technical specifications:	Power 110 VA Voltage tolerance ± 10% Primary connection 3500 mm long Secondary connection 1500 mm long For mounting on a 35 mm support rail EN 50 022
Suitable for Model No.:	3363.X0X 3364.X0X 3214.100 3215.100

Product features

Rated operating voltage:	115 V (primary) , 1~, 50 Hz/60 Hz 230 V (secondary) , 1~, 50 Hz/60 Hz
Dimensions:	Height: 123 mm (4.8 ″) Width: 105 mm (4.1 ″) Depth: 55 mm (2.2 ″)
Snaps on to support rail TS 35:	yes
Packaging unit:	1 pc(s).
Weight/packaging unit:	2.23 kg (4.9 lb.)

Â© Rittal 2018

EAN:	4028177690233
Customs tariff number:	85043121
ETIM 6.0:	EC000855
ETIM 5.0:	EC000855
eCl@ss 8.0/8.1:	27180704
eCl@ss 7.0/7.1:	27189269
eCl@ss 6.0/6.1:	27189269
eCl@ss 5.1/5.1.4:	27180792
Product description (long):	SK Toroidal transformer, 115 V (primary), 1~, 50/60 Hz, 230 V (secondary), 1~, 50/60 Hz, WHD: 105 x 123 x 55 mm

Approvals

Declarations:	Declaration of conformity