Product data sheet

Specifications



network module, Modicon M340, EtherNet/IP and Modbus/TCP, 4 x RJ45

BMXNOC0401

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon M340 automation platform
Product or Component Type	Ethernet TCP/IP network module
Concept	Transparent Ready
Integrated connection type	Ethernet RJ45 10/100 Mbit/s 4 twisted pairs transparent ready class B30
Protective treatment	TC

Complementary

Communication service	Bandwidth management Data Editor (via PC terminal) FDR server Rack Viewer SNMP network administrator Modbus TCP I/O Scanner and Messaging Ethernet/IP I/O Scanner and Messaging Embedded 4-port switch RSTP support Port mirroring
Port Ethernet	10BASE-T/100BASE-TX
Memory usage	Application saving Activating the standard web server
Supply	Internal power supply via rack
Marking	CE
Local signalling	1 LED (green) for processor running (RUN) 1 LED (red) for processor or system fault (ERR) 1 LED (amber) for status of Ethernet network (ETH STS) 1 LED (green/red) for MS (Module Status) 1 LED (green/red) for NS (Network Status)
Control Type	Processor or system fault (ERR)
Current consumption	555 mA 3.3 V DC
Module format	Standard
Product Weight	0.4 lb(US) (0.2 kg)

Environment

Ambient Air Temperature for Operation	32…140 °F (0…60 °C)
Relative Humidity	10…95 % without condensation
IP Degree of Protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	CE UL CSA RCM EAC Merchant Navy ATEX zone 2/22 IECEx zone 2/22
Standards	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 IEC 61000-6-5, interface type 1 and type 2 IEC 61850-3, location G IEC 60079-0
Environmental characteristic	Hazardous location class I division 2

Ordering and shipping details

Category	US1PC3418160
Discount Schedule	PC34
GTIN	3595864083575
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.165 in (5.500 cm)
Package 1 Width	4.331 in (11.000 cm)
Package 1 Length	4.724 in (12.000 cm)
Package weight(Lbs)	7.760 oz (220.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	7.910 lb(US) (3.588 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**97 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**15 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.1 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**82 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.4 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**Fb9be8ef-5994-4d0b-9bb6-f04d3f9cbada**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**

Use Again


Repack and remanufacture

Recyclability potential, in %	**32**
Circularity Profile	End of Life Information
Take-back	**No**

Dimensions Drawings

Modules Mounted on Racks

Dimensions

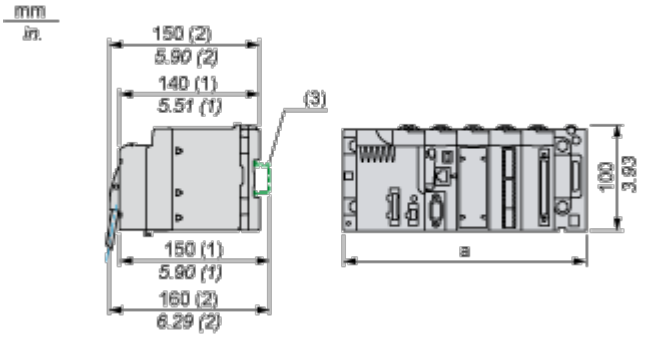

(1) With removable terminal block (cage, screw or spring).


(2) With FCN connector.

(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81


Image of product / Alternate images

Alternative

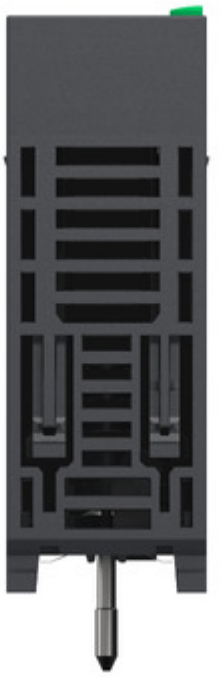






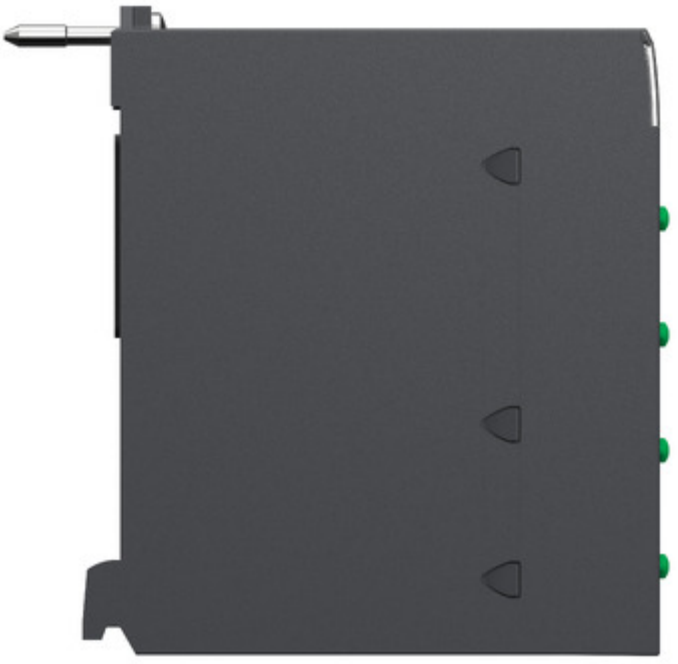


SN:XXXXXXXXXXXX
PV:XX SV:XX RL:XX

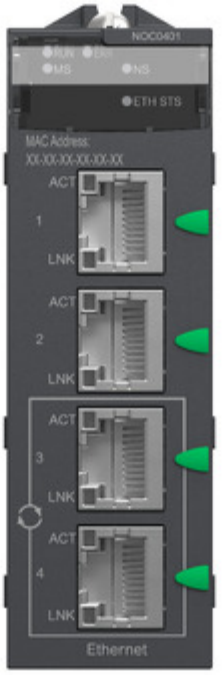
NOC0401
RUN
ERR
MS
NS
ETH STS
MAC Address
XX-XX-XX-XX-XX-XX
ACT
1
LNK
ACT
2
LNK
ACT
3
LNK
ACT
4
LNK
Ethernet