Product End-of-Life Instructions

9001BW Watertight and Dusttight Control Station

Product Range

9001BW Watertight and Dusttight Control Station

Marketing Model

9001BW241, 9001BW146, 9001BW147, 9001BW148, 9001BW148S2, 9001BW151, 9001BW152, 9001BW159, 9001BW240, 9001BW240F, 9001BW240S17, 9001BW241F, 9001BW241S1, 9001BW242, 9001BW243, 9001BW243S4, 9001BW244, 9001BW245, 9001BW246, 9001BW250, 9001BW252, 9001BW253, 9001BW254, 9001BW255, 9001BW256, 9001BW257, 9001BW258, 9001BW260, 9001BWD108, 9001BWD109, 9001BWD219, 9001BWD220, 9001BOC107, 9001BOC214, 9001BOC218, 9001BOC360, 9001BOC361, 9001BOC362



Size in mm:
H x L x D: 108 x 70 x 95

Weight (excluding packaging) in g:
Between 1022 and 1058


Schneider Electric

Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇨ Separation for special treament ⇨ Other dismantling ⇨ Shredding

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

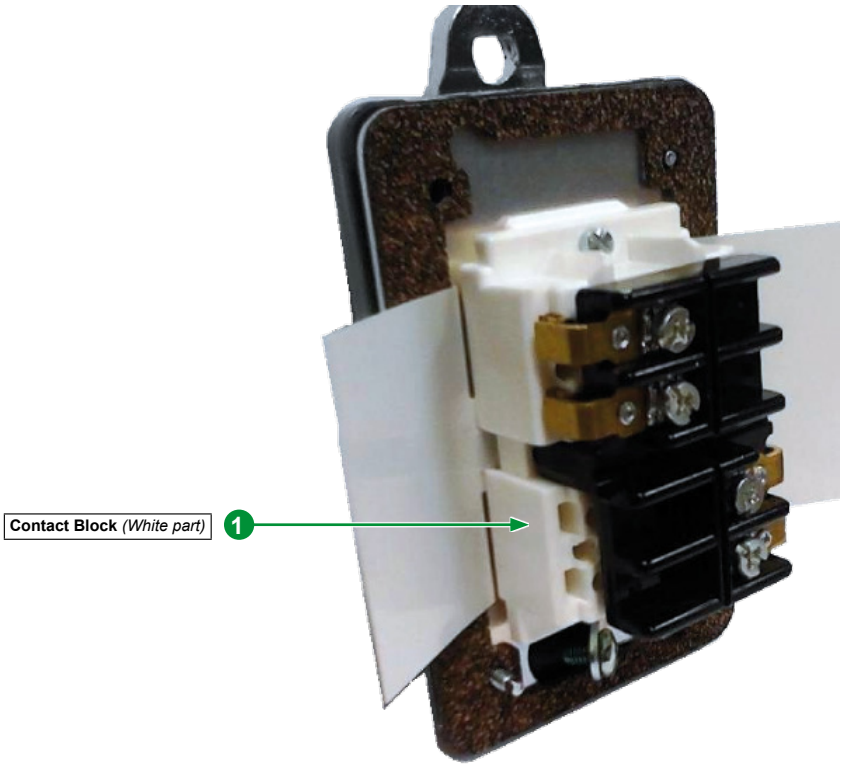

Recommendation	Number on drawing	Components	Weight (g)	Comments
Special treatment: Depollution	1	Plastic part > PBT + PC + FR <	36.8	1 part with Brominated flame retardant

Schneider Electric Industries SAS
35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V1.

Publication : Schneider Electric

© 2013 - Schneider Electric - All rights reserved