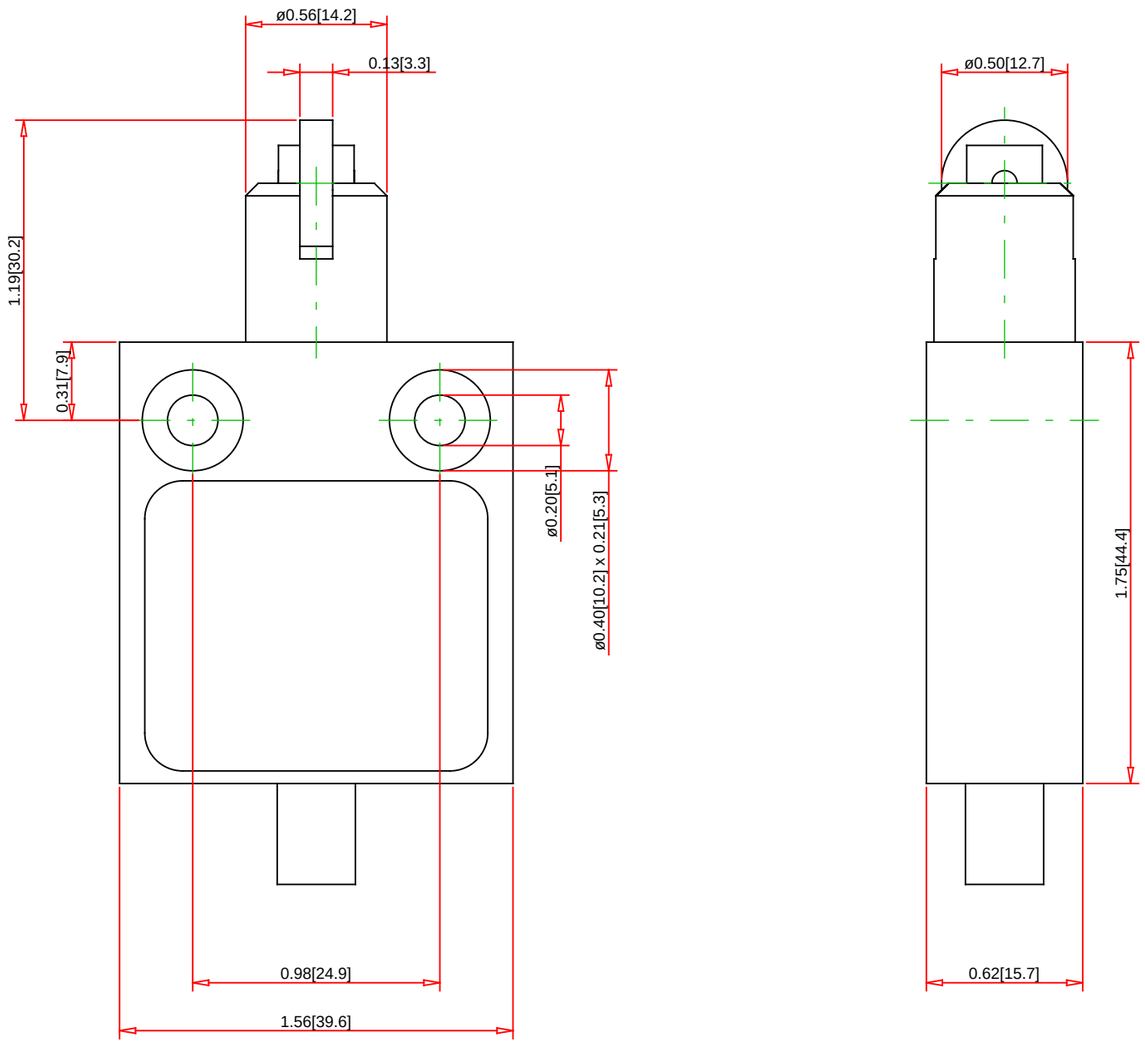


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

# 9007MS03G0200

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

## Technical Information:

| | |
|---|---|
| Terminal Type: | |
| Enclosure Rating: | NEMA 1/2/4/6/6P/12/13; IP67 |
| Approvals: | UL # E42259 CCN NKCR - CSA # LR25490 Class 3211-03 - CE |
| Weight: | 1.2 lb |
| Conforming to Standards: | NEMA and UL type 6P |
| RoHS: | No |
| Operating Temperature Range: | -20 to +220° F (-28.9 to +104° C) |
| Shock Resistance: | 35G |
| Vibration Resistance: | 10G (75 to 1200Hz) |
| Max. Actuation Speed : | |
| Repeat Accuracy: | |
| Operating Torque/Force: | 80 Ounces |
| Cable Length: | 6 ft |

## Specification:

| | |
|---|---|
| Description: | 9007M, gold contacts, cross roller plunger, 6' bottom cable |
| Body Style/Type Description: | NEMA Square D Limit Switches 9007MS/ML Miniature Potted 39 mm Metal Body |
| Head Type: | Metal cross roller plunger |
| Lever Arms: | Lever Arm (ordered separately) |
| Body with Contact Type: | 1 N.O. / 1 N.C. SPDT Snap Action Form C - Gold |
| Conduit Thread: | 6 ft |
| Ampere Rating Continuous: | 100mA/30mA |
| Maximum Voltage Rating: | 125VAC/28VDC |
| Actuation: | Horizontal - Cross |
| Actuator Action: | Momentary |
| Lever Arm Length: | |
| Roller Dimension: | 0.5 in (13mm) |
| Roller Material: | Stainless Steel |
| Contact Configuration: | 1 N.O./1 N.C. |
| Contact Operation: | Snap Action |
| Connection Type: | #18 AWG SJTO Cable - Yellow |
| Head Material: | Stainless steel/brass |
| Positive Opening: | No |