


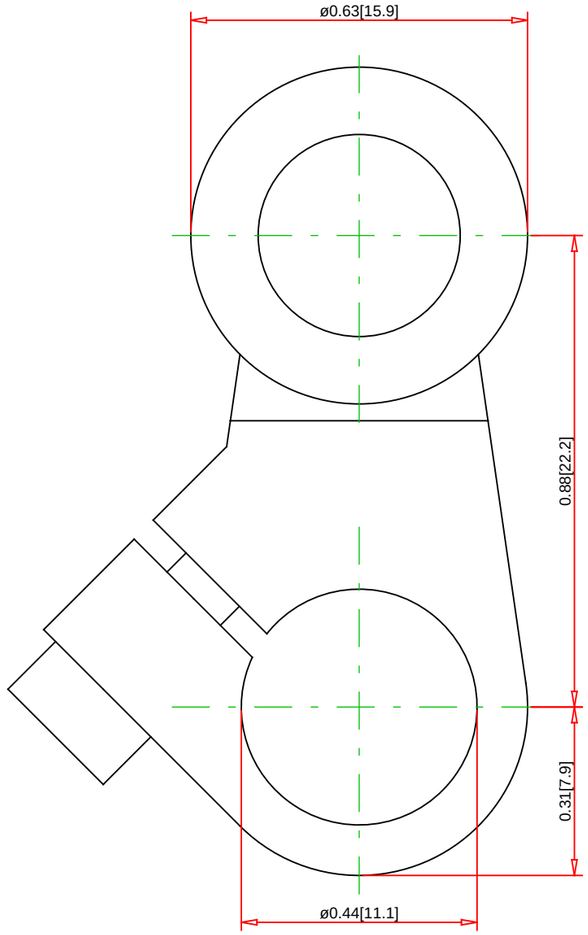


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

# 9007AA2

Telemecanique Sensors

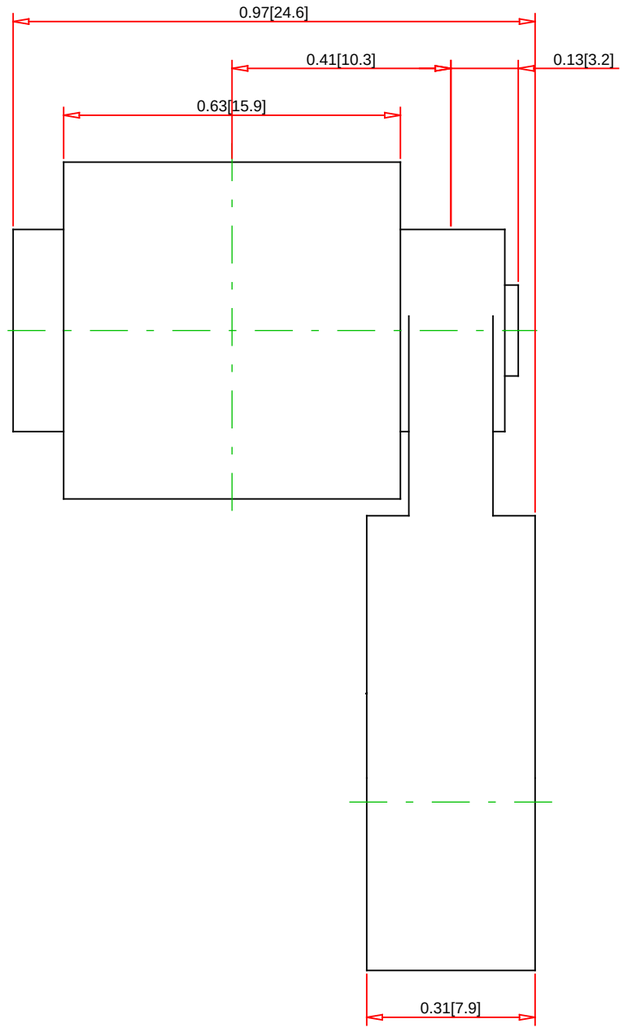Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

## Technical Information:

| | |
|---|---|
| Terminal Type: | |
| Enclosure Rating: | |
| Approvals: | |
| Weight: | 0.07 |
| Conforming to Standards: | |
| RoHS: | No |
| Operating Temperature Range: | |
| Shock Resistance: | |
| Vibration Resistance: | |
| Max. Actuation Speed : | |
| Repeat Accuracy: | |
| Operating Torque/Force: | |
| Cable Length: | |

## Specification:

| | |
|---|---|
| Description: | 9007C Lever Arm, Cast zinc lever arm 0.88 inches long, with 0.63 dia. X 0.63" wide metal roller |
| Body Style/Type Description: | NEMA Square D 9007 Limit Switches 9007C Heavy Duty SemiModular 39mm Metal Body |
| Head Type: | |
| Lever Arms: | Cast zinc lever arm 0.88 inches long, with 0.63 dia. X 0.63" wide metal roller |
| Body with Contact Type: | |
| Conduit Thread: | |
| Ampere Rating Continuous: | |
| Maximum Voltage Rating: | |
| Actuation: | |
| Actuator Action: | |
| Lever Arm Length: | 0.88 Inches |
| Roller Dimension: | 0.63 x 0.63 Inches |
| Roller Material: | Sintered Iron (Oil-Impregnated) |
| Contact Configuration: | |
| Contact Operation: | |
| Connection Type: | |
| Head Material: | |
| Positive Opening: | No |