
Push-In Cable Connectors

Rugged one-piece design provides fast tool-free install!

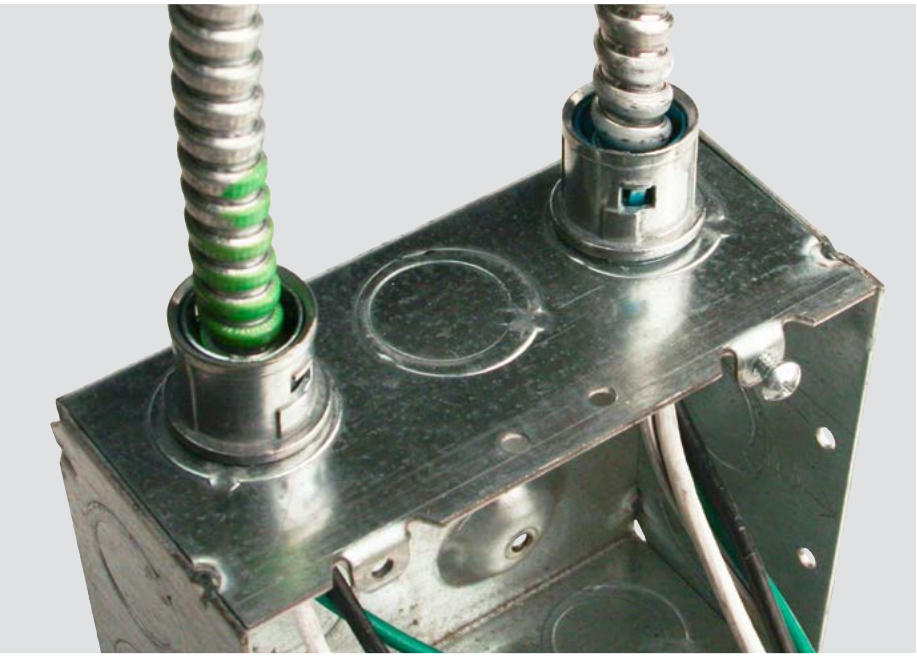

FEATURES


- Fits standard 1/2" knockouts in electrical boxes or enclosures
- Both connectors designed to terminate MC, MCI-A, AC, AC HCF, MCI-A HFC, MC-PCS AND RWFMC
- 40RAC tinted blue inside to indicate larger cable range
- Die-cast zinc construction with nylon anti-short bushing
- For use in dry locations
- See back for cable size ranges

APPLICATIONS

RACO's new Push-in cable connectors make it easy to secure metal-clad cable into boxes or enclosures. Simply insert a cable into the cable opening, then snap the box end of the connector into a box knockout, done! No tools needed for a secure assembly. Push-in connectors are perfect for new or old work and can be removed and reused.



38RAC

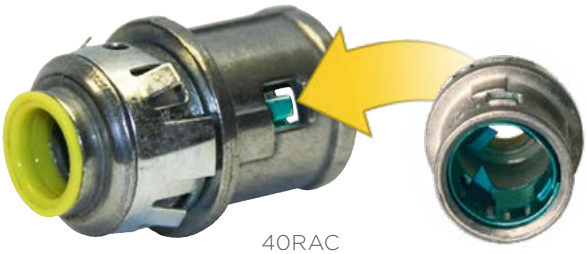

40RAC

Cat. No.	Description	Unit Ctn. Qty.	Ctn. UPC-A	Ship Ctn. Qty.	Ctn. I2of5
38RAC	3/8" Push-In Connector (1/2" KO)	50	30050169000381	500	50050169000385
40RAC	3/8" Push-In Connector (1/2" KO)	50	30050169000404	500	50050169000408

05/2022
RA_SEL_PUSH-IN-435-REV3

© 2022 Raco, a division of Hubbell Incorporated. All rights reserved. Specifications subject to change without notice.
3902 W Sample Street • South Bend, IN 46619 / Tel 574.234.7151 / www.hubbell.com/raco

Cable Ranges & Instructions

38RAC

CABLE TYPE (Steel & Aluminum)	CABLE RANGES
MC	14/2 - 10/3
MCI-A	
AC/HCF	
MCI-A HCF	12/2 - 10/3
MC-PCS (SOLID)	12/2 - 12/3
RWFMC CONDUIT	3/8" TRADE SIZE FLEX Anti Short Bushing Required

Cable Diameter Range: 0.402" - 0.610"


40RAC

CABLE TYPE (Steel & Aluminum)	CABLE RANGES
MC	14/3 - 10/3
MCI-A	
AC	
AC HCF	14/2 - 10/3
MCI-A HCF	12/2 - 10/3
MC-PCS (SOLID)	12/2 - 12/3
RWFMC CONDUIT	3/8" TRADE SIZE FLEX Anti Short Bushing Required


Cable Diameter Range: 0.470" - 0.610"

38RAC/40RAC Connector Removal Instructions

1

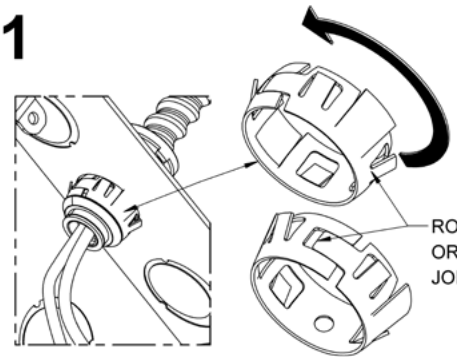


2

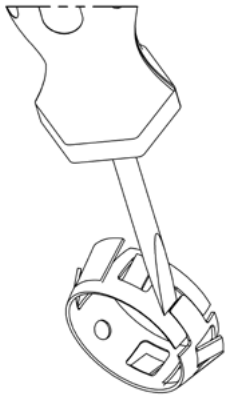

USING A SCREWDRIVER PULL
JOINT TAB UP TO REMOVE RING

3



AFTER RING IS REMOVED
SLIDE CONNECTOR OUT

****CONNECTOR CAN BE REUSED BY SLIDING THE RING BACK IN PLACE****

© 2022 Raco, a division of Hubbell Incorporated. All rights reserved. Specifications subject to change without notice.
3902 W Sample Street • South Bend, IN 46619 / Tel 574.234.7151 / www.hubbell.com/raco