
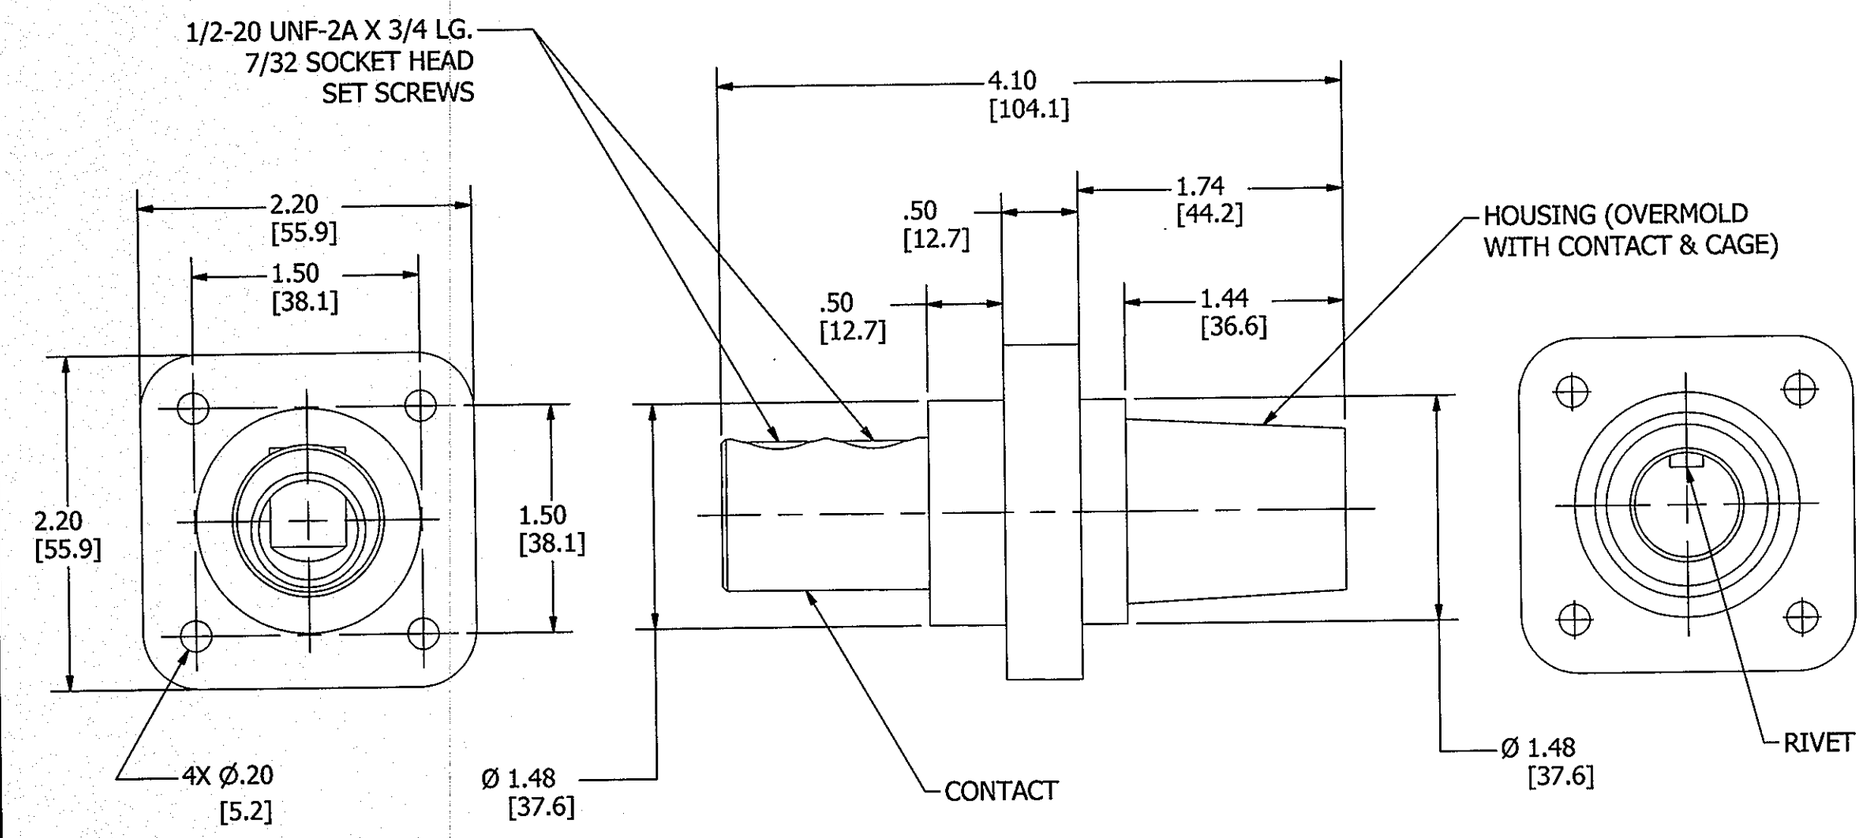


LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
CONTACT	BRASS	
RIVET	BRASS	
CAGE	NYLON	BLACK
SET SCREW	STEEL	NICKEL
LEAD WIRE	COPPER	
COPPER SHEET	COPPER	

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☐

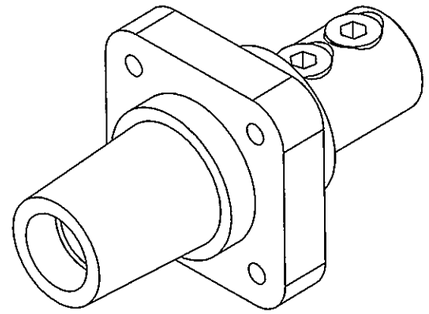

CATALOG NO. HBLFRBK
(NOT SHOWN TO SCALE)

NOTES:

1. DIMENSIONS ARE IN INCHES ± .02
   [mm] ± .5
2. RATING : 600VAC/250VDC 400 AMP.
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12,
   SEE INSTRUCTION SHEET.
4. CABLE SIZE #4 AWG - 4/0, COPPER ONLY.
5. LEAD WIRE & COPPER SHEET NOT SHOWN.

HUBBELL CAT. NO.	COLOR
HBLFRBK	BLACK
HBLFRW	WHITE
HBLFRGN	GREEN
HBLFRR	RED
HBLFRBL	BLUE
HBLFRO	ORANGE
HBLFRBN	BROWN
HBLFRY	YELLOW

REV	DESCRIPTION	APP	DATE
4	REDRAWN WITH EMBEDDED CAD MODEL WITH NO CHANGES TO PART GEOMETRY. PER DCN 21895 SPN	DJP	2/5/16

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
SINGLE POLE FEMALE RECEPTACLE
W/DOUBLE SET SCREW

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX = ± .005
ANGLES = ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY	MJM	APP. BY	TWB
TR. BY		SCALE	1:1
CHK. BY	TWB	DATE	6/11/2003

B

M-8924

4

CODE 74545