


SCREW: NONE	MATERIAL: NONE	REV: C	 800-776-9775 www.ilsco.com
CAT. NO.: SEE CHART	PLATING: NONE	DRAWN BY: JG SCALE:	
INFORMATION SHEET: NONE	MARKING: NONE	DATE: 11/6/2007 SIZE: A	
		DWG. NO. R1755 SHEET: 1 OF 1	

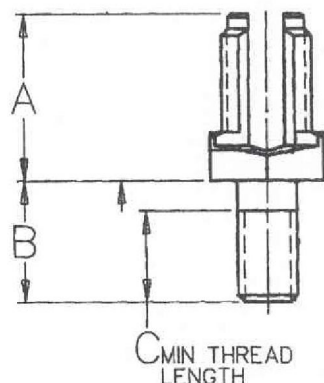

CONDUCTOR RANGE AWG MM²
STRANGED SOLID

PART #	CAT NO	MAX	MIN	MAX	MIN	MAX DIA RANGE	STUD SIZE	A	B	C
R1755-00	SPDS-0*	8	12 4mm2	8 10mm2	12 4mm2	.146 - .080	1/4 20 X 1/2	13/16	1/2	23/64
R1755-01	SPDS-1*	7 10mm2	10 6mm2	6 10mm2	10 6mm2	.170 - .102	1/4 - 20 X 1/2	31/32	1/2	23/64
R1755-02	SPDS-2*	5 16mm2	10 6mm2	4 16mm2	10 6mm2	.217 - .102	5/16 - 18 X 5/8	1 1/8	5/8	25/64
R1755-03	SPDS-3*	3 25mm2	10 6mm2	2 35mm2	10 6mm2	.271 - .102	3/8 - 16 X 5/8	1 1/4	5/8	29/64
R1755-04	SPDS-4*	1 35mm2	8 6mm2	2 35mm2	8 10mm2	.332 - .128	3/8 - 16 X 5/8	1 3/8	5/8	29/64
R1755-05	SPDS-5*	1/0 50mm2	2 35mm2	2 35mm2	-----	.385 - .258	1/2 - 13 X 3/4	1 19/32	3/4	37/64
R1755-06	SPDS-6*	2/0 70mm2	2 35mm2	2 35mm2	-----	.443 - .258	1/2 - 13 X 3/4	1 13/16	3/4	37/64
R1755-07	SPDS-8*	4/0 95mm2	1 35mm2	-----	-----	.570 - .289	5/8 - 11 X 1	2 1/16	1	51/64
R1755-08	SPDS-9*	350 150mm2	1/0 70mm2	-----	-----	.715 - .373	5/8 - 11 X 1	2 3/4	1	51/64
R1755-09	SPDS-10*	500 240mm2	3/0 95mm2	-----	-----	.840 - .464	3/4 - 10 X 1 1/4	3 1/8	1 1/4	63/64