Thomas&Betts



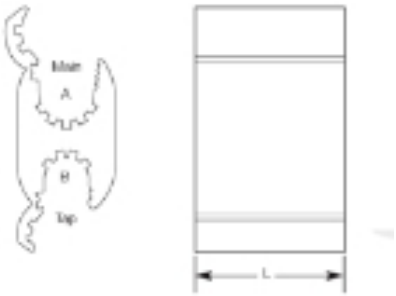

H-Tap Connectors

T&B Catalog Number: WR229

UPC Number: 78378610014

Status: Active

Description:

Aluminum Wide Range H-Type Compression Connector Main: 2/0 ACSR, 3/0 - 2/0 Str., Tap: 1/0 - 2 ACSR, 1/0 - 1 Str., Die: D, D3

Features

	Made of 1350 Aluminum alloy to provide high strength and conductivity. Prefilled with oxide inhibitor held captive in the rib/connection area.
	Enables excellent connector contact without distorting the conductor's shape.
	Fold-in tabs provide positive tab interlock as tool closes.
	RUS accepted and complies with ANSI C119.4

General

Style	Type WR - Supplemental O and D Die Connectors
Material	Aluminum
Standard Conductor Main - ASCR	2/0
Standard Conductor Main - Stranded	3/0, 2/0
Standard Conductor Tap - ASCR	1/0, 1, 2
Standard Conductor Tap - Stranded	1/0, 1
Compact Conductor Main - ASCR	3/0, 2/0
Compact Conductor Main - Stranded	3/0
Compact Conductor Tap - ASCR	1/0, 1
Compact Conductor Tap - Stranded	2/0, 1/0

Dimension Information

Length (inches)	1 7/8"
Conductor Diameter Main Max.	0.470
Conductor Diameter Main Min.	0.410
Conductor Diameter Tap Max.	0.398
Conductor Diameter Tap Min.	0.316

Tooling

Application Tools	JB12A, JB12B, 12A, Y-35
Connector Die	D
No. Indents Mechanical Tool	5
No. Indents Hydralic Tool	2

Packaging

T&B Inner Pack	25
Package in Units	250
T&B Sold in UOM	Each
T&B Weight Per UOM	17 lbs. per 100

Certifications

RoHS Compliance	Yes

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125

T&B Technical Support
MS 3B-50
8155 T&B Blvd.

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289

www.tnb.com Memphis, TN 38125 Fax: (901) 252-1321
Email:techsupport@tnb.com